



# MORBARK



MADE FOR **MORE** TO KEEP PACE WITH **YOU**

# 2400X WOOD HOG HORIZONTAL GRINDER

Ideal for niche markets like municipal recycling, pallet recycling, lot clearing, nurseries and tree care debris, the **Morbark 2400X Wood Hog Horizontal Grinder** is perfect for processing yard waste, brush and other mixed woody feedstock into marketable end-product. Designed to be modular and available in multiple configurations for various applications, this grinder can take your business to the next level.

## FEATURES AND BENEFITS

- Sloped infeed sides give the operator improved visibility and loading efficiency.
- Single side-load grate system and single side-load anvil allows for single-person removal.
- Adjustable backside flat idler allows the operator to adjust drive belt tensioning with no need to move the engine.

[MORBARKDEALERS.COM](http://MORBARKDEALERS.COM)



# MORBARK®



# MORBARK® 2400X WOOD HOG SPECIFICATIONS

Specifications may vary with equipment options


GENERAL	US	METRIC
Length (transport)	29'7"	9.02 m
Height (transport)	11'4"	3.45 m
Width	7'6"	2.26 m
Gross Weight (approximate)	19,900 lb	9,026.5 kg
Axle Weight (approximate)	17,900 lb	8,119.3 kg
Tongue Weight (approximate)	2,000 lb	907.2 kg
Engine	Volvo	
Horsepower	234 HP	174 kW
Fuel Capacity (tank)	88 gallons	333 liters
Hydraulic Oil	63 gallons	238.5 liters
Infeed Opening	23" x 53"	58.4 x 134.6 cm
Screen Area	1,304 square inches	8,413 square cm
Brakes	Electric	
Towing Arrangement	Pintle hitch	
Tires	(4) 235-75R-17.5H	
Tracks	Optional - 308 Caterpillar Undercarriage	

## EQUIPMENT HIGHLIGHTS


- Sloped infeed walls for improved visibility
- Variable speed infeed system consisting of live floor equipped with slat chain
- Removal bottom infeed clean-out door
- Hydraulically operated debris containment door
- Heavy-duty, pinned rotor complete with (18) hammers and (18) replaceable inserts
- Dual belt discharge consisting of primary aggregate belt conveyor discharge onto a secondary stacking conveyor.
- NACD 11.5" triple plate clutch
- Independent adjustable drive belt tensioner
- Single, side-load grate system made of AR450 steel available in multiple hole sizes and pattern

## OPTIONS INCLUDE

- Magnetized end pulley for ferrous metal removal
- CAT 308 undercarriage with 450 mm triple grouser pads
- Electric power

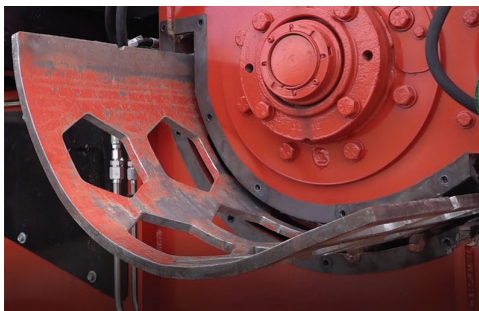

Single, side-load grate system and single side-load anvil allow for single-person removal.

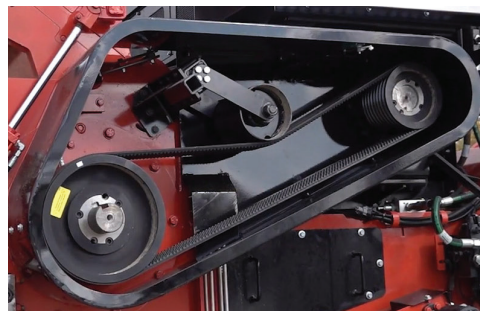

Adjustable backside flat idler allow the operator to adjust drive belt tensioning with no need to move the engine.



Optional folding conveyor with 14' 6" (4.42 m) discharge height

